
SUPERIOR CAPPER FEATURES

SCREW CAP RECAPPERS Technical support available Caps, decaps or recaps 96-48-24 No adapters required Screw Cap tubes at once in less than 30 seconds Cost-effective solution to cap, decap or recap a row Easy-to-use graphical touch of 8-6-4 tubes at once screen interface Models available for Micronic Caps a row of 8-6-4 tubes in 96- (Standard and Low Profile), 5 seconds and a whole rack 48- and 24-format Screw Caps of 96 tubes within 1 minute as well as caps from other brands Each Screw Cap is tightened Extremely durable design for securely and uniformly reliable operation

PUSH CAP (DE)CAPPERS



ADDITIONAL SERVICES

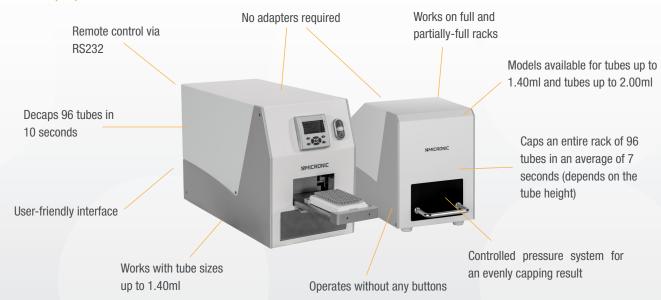

Compatibility with automation and robotics

The Push Cap (De)Cappers and Screw Cap Recappers can be integrated into automated systems and robotics. If you require technical assistance during installation, please contact us.

Compatibility with other brands

The Push Cap (De)Cappers and Screw Cap Recappers are compatible with other brands of tubes, caps and racks. Please contact us for more information.

CAPPER OVERVIEW & SPECIFICATIONS

Automated Cappers and Decappers	Screw Cap	Screw Cap	Screw Cap	Screw Cap	Push Cap	Push Cap	Push Cap
	Recapper	Recapper	Recapper	Recapper	Capper	Capper	Decapper
	CS500	CS510/520	CS700	CS710/720	CP600	CP610	CP620
Basic Features Equipment type Push or Screw Caps Rack compatibility Tube compatibility Cycle time (whole rack)*	Recapper Screw Caps 96-well Up to 2.00ml 60 seconds	Recapper Screw Caps 48/24-well Up to 6.00ml 45 seconds	Recapper Screw Caps 96-well Up to 1.40ml 30 seconds	Recapper Screw Caps 48/24-well Up to 6.00ml 30 seconds	Capper Push Caps 96-well Up to 1.40ml 7 seconds	Capper Push Caps 96-well Up to 2.00ml 7 seconds	Decapper Push Caps 96-well Up to 1.40ml 10 seconds
Dimensions (mm)	178 x 161 x 710	178 x 161 x 710	590 x 251 x 460	590 x 251 x 460	312 x 209 x 286	312 x 209 x 324	531 x 258 x 36
Weight	5.5kg	5.5kg	38kg	38kg	14kg	16kg	25kg
Adapters required	No	No	No	No	No	No	No
Voltage	115-230V	115-230V	115-230V	115-230V	115-230V	115-230V	115-230V
Warranty	1 year	1 year	1 year	1 year	1 year	1 year	1 year

^{*} The cycle time can vary depending on the tube type used.

TECH NOTE - REPETITIVE OPENING AND CLOSING OF TUBES

The process of capping and decapping tubes at laboratories might seem harmless. However, when dealing with very small sample volumes, the repetitive opening and closing of tubes without loss of sealing performances is highly important.

The Micronic Technology Center evaluated the durability of Micronic 1.40ml Screw Cap and Push Cap tubes in combination with Micronic Screw Caps and TPE Push Caps. Durability tests were performed by opening and closing the tubes up to 100 times manually and electrically.

The Tech Note "Durability of Sample Storage Products" explains the results of the tests and demonstrates the excellent durability of Micronic tubes and caps after extensive capping and decapping, which guarantees the reliability of Micronic products in any lab situation.



Архангельск (8182)63-90-72 Астана (7172)727-132 Астрахань (8512)99-46-04 Барнаул (3852)73-04-60 Белгород (4722)40-23-64 Брянск (4832)59-03-52 Владивосток (423)249-28-31 Волгоград (844)278-03-48 Вологда (8172)26-41-59 Воронеж (473)204-51-73 Екатеринбург (343)384-55-89 Иваново (4932)77-34-06 Ижевск (3412)26-03-58 Иркутск (395)279-98-46 Казань (843)206-01-48 Калининград (4012)72-03-1 Калуга (4842)92-23-67 Кемерово (3842)65-04-62 Киров (8332)68-02-04 Краснодар (861)203-40-90 Краснорярск (391)204-63-61 Курск (4712)77-13-04 Липецк (4742)52-20-81 Магнитогорск (3519)55-03-13 Москва (495)268-04-70 Мурманск (8152)59-64-93 Набережные Челны (8552)20-53-4 Нижний Новгород (831)429-08-12 Новокузнецк (3843)20-46-81 Новосибирск (383)227-86-73 Омск (3812)21-46-40 Орел (4862)44-53-42 Оренбург (3532)37-68-04 Пенза (8412)22-31-16 Пермь (342)205-81-47 Ростов-на-Дону (863)308-18-15 Рязань (4912)46-61-64 Самара (846)206-03-16 Санкт-Петербург (812)309-46-40 Саратов (845)249-38-78 Севастополь (8692)22-31-93 Симферополь (3652)67-13-56 Смоленск (4812)29-41-54 Сочи (862)225-72-31 Ставрополь (8652)20-65-13

Сургут (3462)77-98-35
Тверь (4822)63-31-35
Томск (3822)98-41-53
Тула (4872)74-02-29
6-40
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Ярославль (4852)69-52-93

Казахстан (772)734-952-31



BROCHURE



CAPPING & DECAPPING RANGE

Manual and Automated Equipment

Россия (495)268-04-70



Архангельск (8182)63-90-72 Астана (7172)727-132 Астрахань (8512)99-46-04 Барнаул (3852)73-04-60 **Б**елгород (4722)40-23-64 Брянск (4832)59-03-52 сток (423)249-28-3 Волгоград (844)278-03-48 Зологда (8172)26-41-59 Воронеж (473)204-51-73 Екатеринбург (343)384-55-89 Иваново (4932)77-34-06

Ижевск (3412)26-03-58 Иркутск (395)279-98-46 Казань (843)206-01-48 Калининград (4012)72-03-8 ово (3842)65-04-62 Киров (8332)68-02-04 Краснодар (861)203-40-9 расноярск (391)204-63-61 Липецк (4742)52-20-81

Киргизия (996)312-96-26-47

AUTOMATED CAPPING & DECAPPING SYSTEMS

урманск (8152)59-64-93 Набережные Челны (8552)20-53-41 нижний Новгород (831)429-08-12 Новокузнецк (3843)20-46-81 восибирск (383)227-86-73 Омск (3812)21-46-40 Орел (4862)44-53-42 Оренбург (3532)37-68-04

Магнитогорск (3519)55-03-13

Москва (495)268-04-70

Ростов-на-Дону (863)308-18-15 Рязань (4912)46-61-64 Самара (846)206-03-16 Санкт-Петербург (812)309-46-40 Саратов (845)249-38-78 Симферополь (3652)67-13-56 нск (4812)29-41-54 Сочи (862)225-72-31 поль (8652)20-65-13

Казахстан (772)734-952-3

Пермь (342)205-81-47

Тверь (4822)63-31-35 Томск (3822)98-41-53 Тула (4872)74-02-29 Ульяновск (8422)24-23-59 Уфа (347)229-48-12 Хабаровск (4212)92-98-04 елябинск (351)202-03-61 ереповец (8202)49-02-64

https://micronic.nt-rt.ru/ || moc@nt-rt.ru

Россия (495)268-04-70

MANUAL CAPPING & DECAPPING SYSTEMS

Micronic offers a range of products to make manual capping and decapping more efficient. For the manual (de)capping of Screw Caps, there are several options available. The Screw Cap Recappers offer a quick and reliable solution to seal Screw Caps Tubes in 96-, 48- and 24-well format. The Screw Cap Recapper CS100 is set to a precise torque value and stops turning when the perfect seal is established.

For the decapping of Push Caps, the Micronic Manual Push Cap Decappers are developed. The range includes the Manual Decapper-1, which is made of high quality plastic, and designed to remove a single Push Cap. The Manual Decapper-8 is also made of high quality plastic and removes Push Caps in a row of eight. The Manual Decapper-8 Aluminum removes individual Push Caps in a row of eight from frozen tubes. All manual decappers provide a convenient and fast removal of the TPE Push Caps.

The Push Cap Capper CP400 can apply uniform pressure to Push Caps in an entire 96 tubes rack in only a single action. This device is able to seal full racks or partially full racks with the complete range of Micronic TPE or EVA style Capmats, Capbands and Capclusters. The Capper is also compatible with other brands of storage tubes and racks. To ensure optimum results an adapter matched to your specific rack type and tube height is supplied.

Manual Push Cap Decappers

MP54000 (-1), MP54001 (-8) & MP65010 (-8 Aluminium)



For Push Caps

96-well format compatible

kg Light weight

57 x 50 x 11 mm (-1) 90 x 72 x 11 mm (-8)

Push Cap Capper CP400

Screw Cap

Recapper CS100/10/20

MP35480, MP35490 & MP35492

For Screw Caps

24/48/96-well format compatible

Light weight

→ 130 x 19 mm

MP35050



For Push Caps

96-well format compatible





262 x 185 x 164 mm

To accelerate your capping and decapping process, Micronic offers a complete range of automated (De)Capping devices. Developed in conjunction with several leading laboratories, the Screw Cap Recappers CS500, CS510 and CS520 offer the ability to cap, decap or recap a row of tubes in less than 5 seconds and a whole rack in only 1 minute. This is 10 times faster than by hand and improves productivity. Add the docking station to the CS500, CS510 or CS520 and be assured of consistent capping. The automated Screw Cap Recappers CS700, CS710 and CS720 are "must-have" equipment for higher throughput users. The devices are user-friendly and extremely durable and reliable and cap entire racks in 30 seconds.

The Micronic Push Cap Cappers CP600 and CP610 are designed to meet the special requirements of our customers and are compatible with the following caps: TPE Capmats, Capbands, Capclusters and EVA Capmats. The Micronic Cappers seal an entire rack of 96 tubes within approximately 7 seconds and have a guaranteed evenly capping result. With the ever-growing demand for higher sample throughput in many laboratories, the Micronic Cap Decapper CP620 enables significant productivity gains to be made in the opening of multiple sample storage tubes capped with Push Caps. The CP620 is able to decap 96 tubes in 10 seconds. Through a friendly user interface you can choose the right rack to decap, without using different adapters.

Screw Cap Recapper CS500







96-well format compatible



Cycle time: 5 sec./8 tubes



115 - 230 Volt

178 x 161 x 710 mm




No adapters required

Screw Cap Recapper CS510/CS520











No adapters required

J 178 x 161 x 710 mm

Screw Cap Recapper CS700

MP35450





For Screw Caps







115 - 230 Volt

No adapters required

590 x 251 x 460 mm

IN-HOUSE ASSEMBLY & EXCEPTIONAL SERVICE

The Micronic Capping & Decapping equipment is designed and assembled in-house. We have well-trained personnel on hand to provide service on equipment. These services range from annual maintenance, installation support and customization, to repairs.

High-level service is of paramount importance at Micronic. By assembling equipment in-house, Micronic's equipment assembly personnel and engineers have the first-hand knowledge and skills necessary to perform services quickly and smoothly.

At Micronic, we are committed to offer top-of-the-line products, delivering exceptional quality, reliability and durability. Above all, we stand behind our solutions, and are confident that you will too. Micronic warrants that its products are of satisfactory quality and conform to applicable EU legislation. If the product turns out to be defective, Micronic will arrange to repair or

replace the product during the warranty period. The warranty period begins on the day of Micronic's invoice of the original product and ends after 1 year for (De)Capping equipment. Additionally, we offer calibration services for Micronic Screw Cap Recappers. The service ensures that the Recappers are set to a precise torque value for an optimal sealing performance.



Screw Cap Recapper CS710/720

MP35470 & MP35475





24/48-well format compatible



38 Kg / 84 lbs



No adapters required

590 x 251 x 460 mm

Micronic Push Cap Capper CP600/CP610

MP35020 & MP35021



For Push Caps

96-well format compatible

Cycle time: 7 sec./1 rack

14 & 16 Kg / 31 & 35 lbs

115 - 230 Volt

No adapters required

→ 312 x 209 x 286 & (324) mm

J→ 531 x 258 x 366 mm

For Push Caps

25 Kg / 55 lbs

115 - 230 Volt

No adapters required

96-well format compatible

Cycle time: 10 sec./1 rack

Micronic Push Cap

Decapper CP620